


The **Tow Bar** can be attached to the **DollyCart™** to convert the **DollyCart™** into a trailer that can dump, when pulled behind a riding lawn mower or ATV.



Attach Tow Bar to DollyCart™

1. Place the **DollyCart™** in the CART configuration and turn the cart upright.
2. Insert the legs in the Horizontal Socket Locking Bases with the legs flat, parallel to the **DollyCart™** base.
3. With the Tow Bar Dumping Locking Pin side adjacent to the **DollyCart™**, attach the Tow Bar to the Tow Bar Locking Plate Pin Brackets on the axle with the Tow Bar Plate Locking Pin.

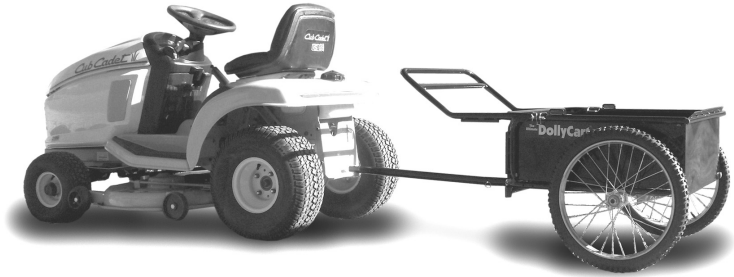


Locking Tow Bar to the DollyCart™

1. Pull the Tow Bar Dumping Locking Pin and adjust the Locking Arm on the Tow Bar over the lip of the **DollyCart™**, past the Tow Bar Dumping Locking Pin Mechanism and secure the Tow Bar with the Tow Bar Dumping Locking Pin behind the Locking Arm.



Tow Bar Extension

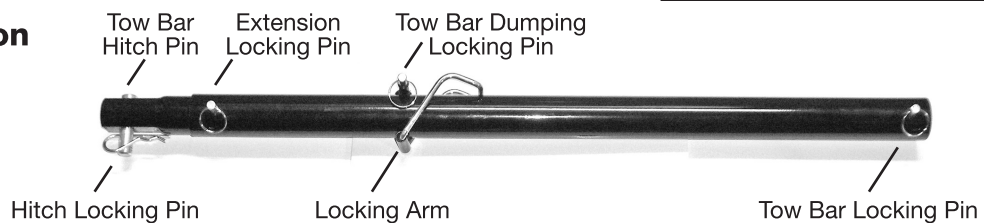

1. Pull the Extension Locking Pin and extend the inside Tow Bar tube to its maximum length, lining up the locking pin holes, and secure with the Extension Locking Pin.

Attach DollyCart™ with Tow Bar to a riding lawn mower or ATV

1. Locate trailer hitch hole on the lawn mower or ATV and secure the Tow Bar to the hole using the Tow Bar Hitch Pin and Hitch Locking Pin.



Do not take riders in the trailer or haul any live animals in the trailer.

